


The indispensable accessory
A revolution in the diamond core drilling

JCS ← STOP

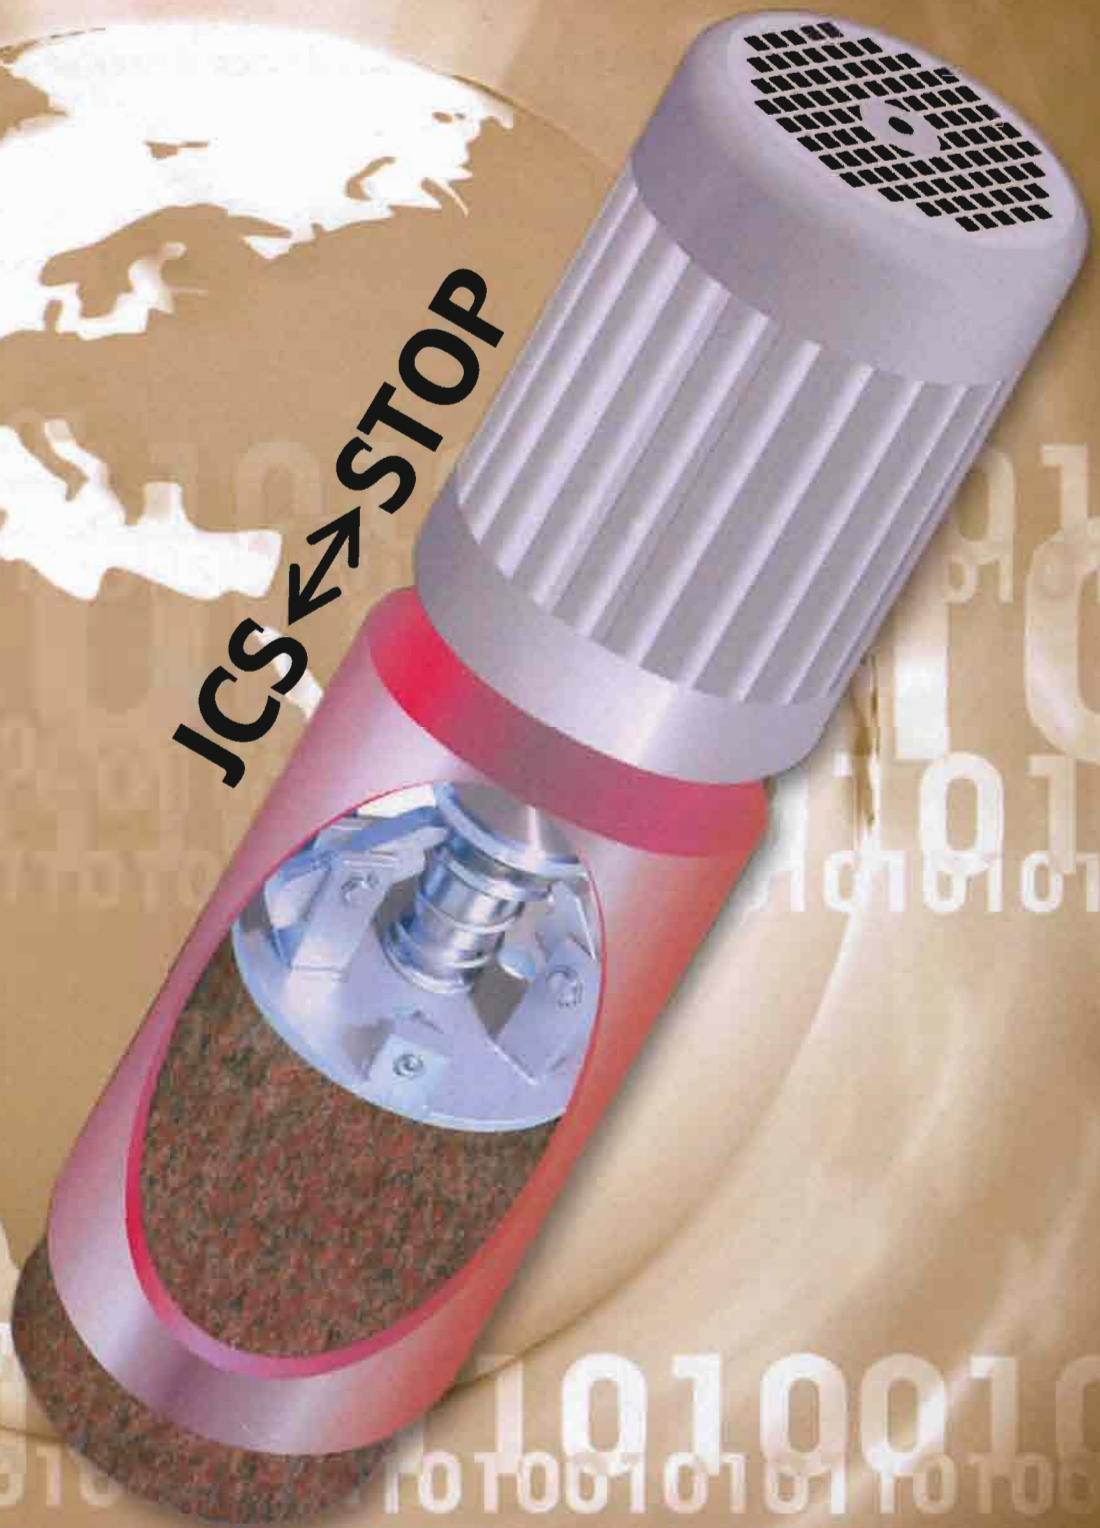

J-C. S. Sciage SA - 1616 Attalens
www.sciage-forage-beton.ch - Tél. 021 947 48 58 - Fax 021 947 33 30

JCS↔Stop
150 / 200 / 250 mm

The indispensable accessory

A revolution in the diamond core drilling



The good function of this device depends exclusively on an accurate fitting.

The JCS↔Stop is a device to hold back the cored section of the diamond drilling tube. It is used in the drilling of concrete slabs and walls.



To function well, it is important to set the device precisely to the inside diameter of the drilling tube. Block then the setting with a lock nut.



The rawplug used must be able to hold back the weight of the spoil. The center axle (threaded rod) must be blocked on the future spoil with a lock nut.



The center of the axle (threaded rod) must keep sufficient space between the top of the device and the lock nut (about 3-5 cm).



To remove the JCS↔Stop and its cored section (spoil) you simply have to:

- unscrew the cutting tube from the drill
- Introduce a rod in to the head of the cutting tube, push out the device and the spoil from the cutting tube or remove the threaded rod with a sprocket spanner.



J.-C. S. Sciage SA
1616 Attalens
www.sciage-forage-beton.ch
Tél. 021 947 48 58
Fax 021 947 33 30